



SECTION 10

ENGINEERED WOOD PRODUCTS

ENGINEERED WOOD PRODUCTS

Tilling Smart Joist

Tilling Smart LVL 15

Tilling Smart Lam GL17C Structural Grade

Tilling Smart Lam GL17C Structural Grade - H2 LOSP

Tilling Smart Lam GL17C Structural Grade - H3 LOSP

Tilling Smart Lam GL18C Structural Grade - Untreated

Tilling Smart Joist Hangers - Face and Top Mount

Dindas Hyspan LVL E13, E14 (F17) E15, E11 and E12

Dindas I joist

Dindas Rimboard

Dindas Web Stiffeners, Hangers and Ancillaries

Dindas GL17C

Dindas GL18C

Dindas GL21C

Hyne Timber Beam 17 - Untreated, H2 or H3 Treated

Hyne Timber Beam 18

Hyne Timber Beam 21

Hyne Timber LGL H3

Performance and Service

Make a smart choice with

SMARTJOIST!

Smart builders are making use of the outstanding service offered with economical SmartJoist - full design and take-off, pre-cut access holes for services and labelling on joists.

Talk to your Finlaysons representative about a SmartFrame® option for your next project



1300 338 390


smartdata@tilling.com.au | www.tilling.com.au

SMARTFRAME®
POWERED BY INNOVATION

SMARTJOIST

Flange: High strength SmartLVL15

Web: 9.5mm & 11.5mm OSB (90mm joists)

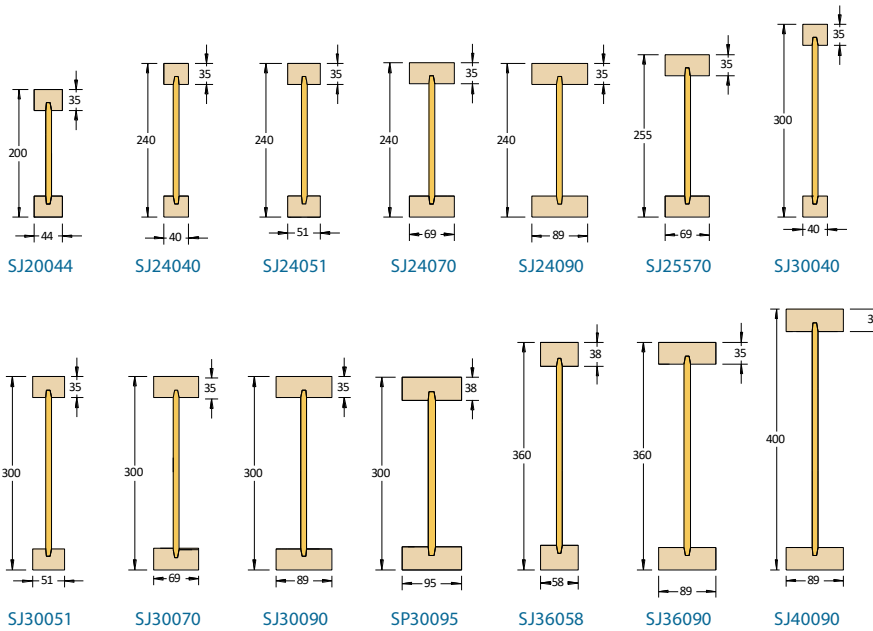

SmartJoist dimension tolerances: Depth: +0-3mm. Flange width: +/-1mm. Flange thickness: (no plus limitation)-2mm.

| Product Code | H2S SmartGuard | H2 LOSP SmartGuard | Dry Weight kg/lm |
|--------------|----------------|--------------------|------------------|
| SJ20044 | | | 2.8 |
| SJ24040 | | | 3.0 |
| SJ24051 | | | 3.4 |
| SJ24070 | | | 3.9 |
| SJ24090 | | | 5.0 |
| SJ25570 | | | 4.6 |
| SJ30040 | | | 3.4 |
| SJ30051 | | | 3.9 |
| SJ30070 | | | 4.2 |
| SJ30090 | | | 5.5 |
| SP30095 | | | 7.5 |
| SJ36058 | | | 4.8 |
| SJ36090 | | | 6.2 |
| SJ40090 | | | 6.2 |

Design Guides available on request or ask your Finlaysons representative about SmartFrames free floor design service.

I-Joist should not be used in external exposed applications.

Note: in most cases a 51mm achieves equal or better spans than a 63mm joist in a competing brand.

SMARTFRAME[®]
POWERED BY INNOVATION



SmartLVL 15

The Smart Alternative to F17



**Now Available
on SmartLVL 15**

SmartLVL 15 now comes with a clear next generation short-term water repellency, H2O Shield™, to replace the old fashioned wax sealers used by most other LVL manufacturers. H2O Shield™ is a water based sealer specifically formulated and exclusively licensed in Australia to Tilling Timber Pty Ltd.

Sales 1800 33 77 03

Technical 1300 668 690

www.tilling.com.au

SMARTLVL15

F17 Spanability



| Product Code | Size (mm) | H2S SmartGuard | H2 LOSP SmartGuard | H3 LOSP SmartGuard | Dry Weight kg/lm |
|--------------|-----------|----------------|--------------------|--------------------|------------------|
| SL9035 | 90 x 35 | | | | 2.0 |
| SL13035 | 130 x 35 | | | | 2.9 |
| SL15035 | 150 x 35 | | | | 3.3 |
| SL17035 | 170 x 35 | | | | 3.7 |
| SL20035 | 200 x 35 | | | | 4.4 |
| SL24035 | 240 x 35 | | | | 5.3 |
| SL30035 | 300 x 35 | | | | 6.6 |
| SL9042 | 90 x 42 | | | | 2.5 |
| SL13042 | 130 x 42 | | | | 3.7 |
| SL15042 | 150 x 42 | | | | 4.3 |
| SL17042 | 170 x 42 | | | | 4.8 |
| SL20042 | 200 x 42 | | | | 5.7 |
| SL24042 | 240 x 42 | | | | 6.8 |
| SL30042 | 300 x 42 | | | | 8.5 |
| SL36042 | 360 x 42 | | | | 10.2 |
| SL40042 | 400 x 42 | | | | 11.4 |
| SL9058 | 90 x 58 | | | | 3.6 |
| SL13058 | 130 x 58 | | | | 5.2 |
| SL15058 | 150 x 58 | | | | 5.9 |
| SL17058 | 170 x 58 | | | | 5.8 |
| SL20058 | 200 x 58 | | | | 7.9 |
| SL24058 | 240 x 58 | | | | 9.6 |
| SL30058 | 300 x 58 | | | | 11.9 |
| SL36058 | 360 x 58 | | | | 14.4 |
| SL40058 | 400 x 58 | | | | 15.9 |
| SL45058 | 450 x 58 | | | | 17.96 |
| SL24075 | 240 x 75 | | | | 13.8 |
| SL30075 | 300 x 75 | | | | 14.2 |
| SL40075 | 400 x 75 | | | | 19.0 |
| SL52575 | 525 x 75 | | | | 25.0 |

Design Guides available on request or ask your Finlaysons representative about SmartFrames tree design service.

Available to order and ex stock. Please call before ordering to confirm availability

Some sizes sold in 600mm increments. Lengths 11.1m, 11.4m and 11.7m to be charged and supplied as 12.0m

SMARTLAM GL17C

UNTREATED



Note: Untreated- For internal applications only.
Appearance "B" visual grade



| Height (mm) | 65mm Thickness | 85mm Thickness |
|-------------|----------------|----------------|
| | Product Code | Product Code |
| 130 | 1306517C | 1308517C |
| 165 | 1656517C | 1658517C |
| 195 | 1956517C | 1958517C |
| 230 | 2306517C | 2308517C |
| 260 | 2606517C | 2608517C |
| 295 | 2956517C | 2958517C |
| 330 | 3306517C | 3308517C |
| 360 | 3606517C | 3608517C |
| 395 | 3956517C | 3958517C |
| 425 | 4256517C | 4258517C |
| 460 | 4606517C | 4608517C |
| 495 | 4956517C | 4958517C |
| 525 | 5256517C | 5258517C |
| 560 | 5606517C | 5608517C |
| 590 | 5906517C | 5908517C |

Sold in 300mm increments out of stock

The return of Laminated Beams is not permitted when it is not a stock line

Add 25% for Appearance "A" Visual Grade

Note: Glulam beams must be maintained in a dry condition and protected from direct exposure to the weather both before and after installation

SMARTLAM GL17C

H2 LOSP TREATED



Note: Treated for termites throughout Australia including North of the Tropic of Capricorn.
 Appearance "B" visual grade
 Not for exposed applications



| Height (mm) | 65mm Thickness | 85mm Thickness |
|-------------|----------------|----------------|
| | Product Code | Product Code |
| 130 | 1306517CH2 | 1308517CH2 |
| 165 | 1656517CH2 | 1658517CH2 |
| 195 | 1956517CH2 | 1958517CH2 |
| 230 | 2306517CH2 | 2308517CH2 |
| 260 | 2606517CH2 | 2608517CH2 |
| 295 | 2956517CH2 | 2958517CH2 |
| 330 | 3306517CH2 | 3308517CH2 |
| 360 | 3606517CH2 | 3608517CH2 |
| 395 | 3956517CH2 | 3958517CH2 |
| 425 | 4256517CH2 | 4258517CH2 |
| 460 | 4606517CH2 | 4608517CH2 |
| 495 | 4956517CH2 | 4958517CH2 |
| 525 | 5256517CH2 | 5258517CH2 |
| 560 | 5606517CH2 | 5608517CH2 |
| 590 | 5906517CH2 | 5908517CH2 |

Sold in 300mm increments

The return of Laminated Beams is not permitted when it is not a stock line

Note: Glulam beams must be maintained in a dry condition and protected from direct exposure to the weather both before and after installation

SMARTLAM GL17C

H3 LOSP TREATED



Note: For installation refer to pages 8 and 9 of the Tilling GL17 Design Guide, available from Finlayson's in hard copy or can be downloaded from www.tilling.com.au



| Height (mm) | 65mm Thickness | 85mm Thickness |
|-------------|----------------|----------------|
| | Product Code | Product Code |
| 130 | 1306517CH3 | 1308517CH3 |
| 165 | 1656517CH3 | 1658517CH3 |
| 195 | 1956517CH3 | 1958517CH3 |
| 230 | 2306517CH3 | 2308517CH3 |
| 260 | 2606517CH3 | 2608517CH3 |
| 295 | 2956517CH3 | 2958517CH3 |
| 330 | 3306517CH3 | 3308517CH3 |
| 360 | 3606517CH3 | 3608517CH3 |
| 395 | 3956517CH3 | 3958517CH3 |
| 425 | 4256517CH3 | 4258517CH3 |
| 460 | 4606517CH3 | 4608517CH3 |
| 495 | 4956517CH3 | 4958517CH3 |
| 525 | 5256517CH3 | 5258517CH3 |
| 560 | 5606517CH3 | 5608517CH3 |
| 590 | 5906517CH3 | 5908517CH3 |

Sold in 100mm increments to order with sufficient lead time (non stock item)

Sold in 300mm increments out of stock

The return of Laminated Beams is not permitted when it is not a stock line

SMARTLAM GL18C

UNTREATED



Note: Untreated- For internal applications only.
Appearance "B" visual grade



| Height (mm) | 65mm Thickness | 85mm Thickness | 110mm Thickness |
|-------------|----------------|----------------|-----------------|
| | Product Code | Product Code | Product Code |
| 120 | HB12065B | HB12085B | HB120110B |
| 155 | HB15565B | HB15585B | HB155110B |
| 185 | HB18565B | HB18585B | HB185110B |
| 215 | HB21565B | HB21585B | HB215110B |
| 240 | HB24065B | HB24085B | HB240110B |
| 270 | HB27065B | HB27085B | HB270110B |
| 300 | HB30065B | HB30085B | HB300110B |
| 330 | HB33065B | HB33085B | HB330110B |
| 360 | HB36065B | HB36085B | HB360110B |
| 390 | HB39065B | HB39085B | HB390110B |
| 420 | HB42065B | HB42085B | HB420110B |
| 450 | HB45065B | HB45085B | HB450110B |
| 480 | HB48065B | HB48085B | HB480110B |
| 510 | HB51065B | HB51085B | HB510110B |
| 540 | HB54065B | HB54085B | HB540110B |

Special sizes can be manufactured. Sizes of beams vary by manufacturer


The return of these Laminated Beams is not permitted when not a stock line

Add 25% for Appearance "A" Visual Grade

Note: Glulam beams must be maintained in a dry condition and protected from direct exposure to the weather both before and after installation




FACE MOUNT HANGERS

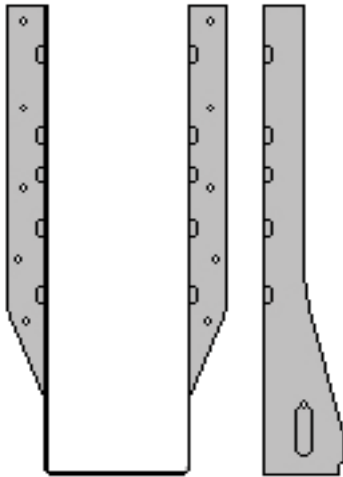

| To Suit Joist | Product Code |
|---------------|--------------|
| SJ20044 | 20044F |
| SJ24040 | 24040F |
| SJ24051 | 24051F |
| SJ24070 | 24070F |
| SJ24090 | 24090F |
| SJ30040 | 30040F |
| SJ30051 | 30051F |
| SJ30070 | 30070F |
| SJ30090 | 30090F |
| SP30095 | 30095F |
| SJ36058 | 36058F |
| SJ36090 | 36090F |
| SJ40090 | 40090F |




TOP MOUNT HANGERS

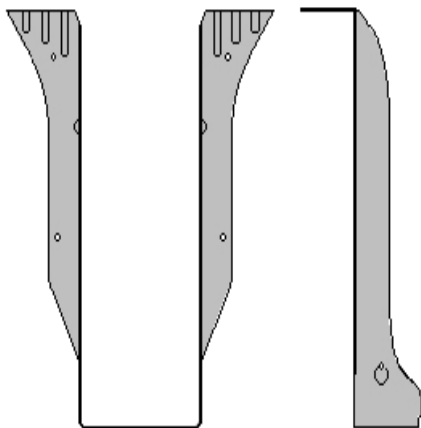

| To Suit Joist | Product Code |
|---------------|--------------|
| SJ20044 | 20044T |
| SJ24040 | 24040T |
| SJ24051 | 24051T |
| SJ24070 | 24070T |
| SJ24090 | 24090T |
| SJ30040 | 30040T |
| SJ30051 | 30051T |
| SJ30070 | 30070T |
| SJ30090 | 30090T |
| SP30095 | n/a |
| SJ36058 | 36058T |
| SJ36090 | 36090T |
| SJ40090 | 40090T |



The perfect on-site design companion

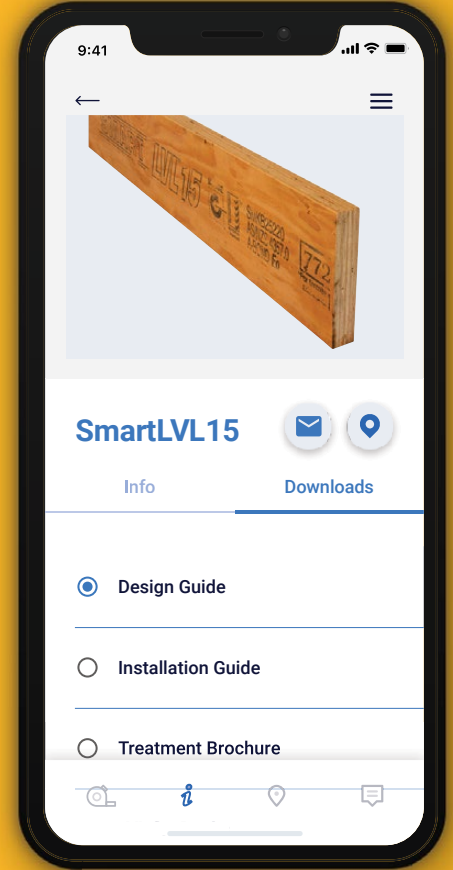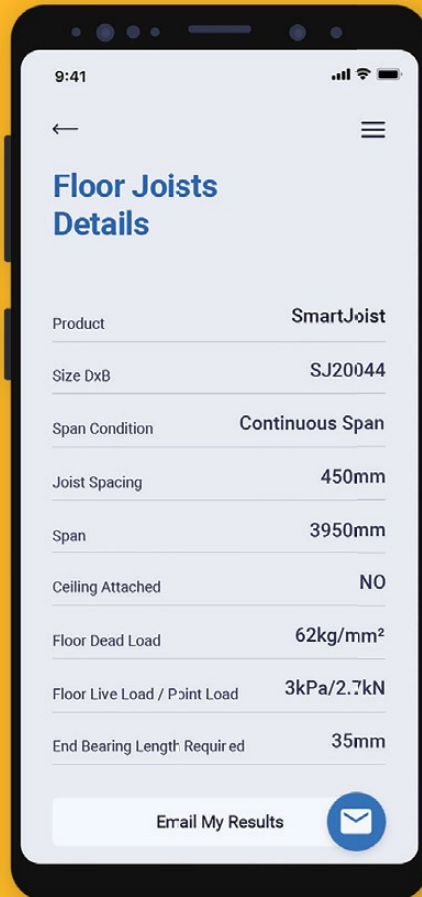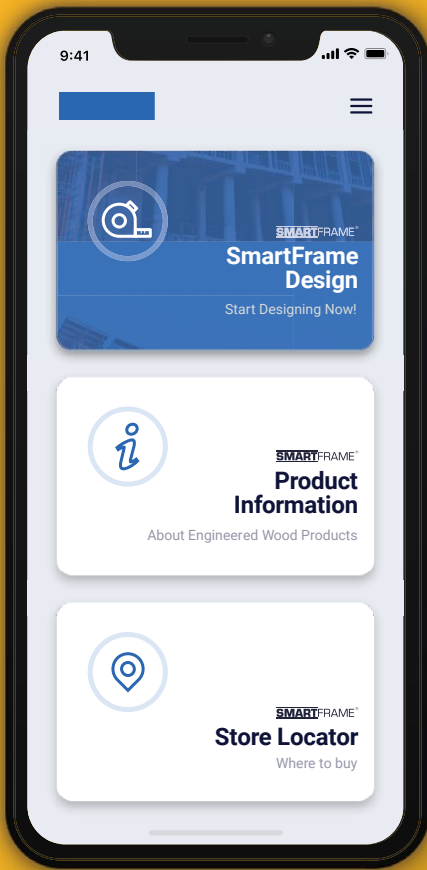

Search for **SmartFrame** in your app store and start designing now on iPhone and Android



DINDAS - LVL E13



| DINDAS LVL E13 | | | |
|----------------|-------------|------------|------------|
| SIZE | H2S Treated | H2 Treated | H3 Treated |
| 150 x 35 | | | |
| 200 x 35 | | | |
| 300 x 35 | | | |
| 90 x 45 | | | |
| 130 x 45 | | | |
| 150 x 45 | | | |
| 170 x 45 | | | |
| 200 x 45 | | | |
| 240 x 45 | | | |
| 300 x 45 | | | |
| 360 x 45 | | | |
| 400 x 45 | | | |
| 90 x 63 | | | |
| 130 x 63 | | | |
| 150 x 63 | | | |
| 170 x 63 | | | |
| 200 x 63 | | | |
| 240 x 63 | | | |
| 300 x 63 | | | |
| 360 x 63 | | | |
| 400 x 63 | | | |
| 450 x 63 | | | |
| 150 x 75 | | | |
| 300 x 75 | | | |
| 400 x 75 | | | |
| 525 x 75 | | | |

PLEASE NOTE:

- LOSP H3 not recommended for use in external, exposed allocation unless installed with effective moisture protection

Cancelled Orders:

- A 20% restocking fee will apply
- Treated to order products returned will only be restocked as H2S
- Freight charges may apply



PLEASE NOTE:

- Sold in 300mm increments from 1.8m - 10.2m
- 10.8m - 12.0m lengths subject to availability at time of order

DINDAS LVL E15

| SIZE | Pack Sizes | H2S Treated | H2 Treated | H3 Treated |
|----------|------------|-------------|------------|------------|
| 90 x 35 | 65 | | | |
| 120 x 35 | 45 | | | |
| 140 x 35 | 40 | | | |
| 190 x 35 | 30 | | | |
| 240 x 35 | 25 | | | |

DINDAS LVL E11

| SIZE | Pack Quantity | H2S Treated | H2 Treated | H3 Treated |
|-----------------|---------------|-------------|------------|------------|
| 140 x 35 Lintel | 63 | | | |
| 190 x 35 Lintel | 45 | | | |

PLEASE NOTE:

- Sold in 300mm increments from 1.8m - 10.2m
- 10.8m - 12.0m lengths subject to availability at time of order

DINDAS I Joist, Rimboard and Web Stiffeners

DINDAS I JOIST

| SIZE | Weight KG per l/m | H2S Treated |
|----------|----------------------|-------------|
| 200 x 45 | 2.85 | |
| 240 x 45 | 2.96 | |
| 240 x 58 | 3.82 | |
| 240 x 90 | 4.56 | |
| 300 x 45 | 3.42 | |
| 300 x 52 | 3.87 | |
| 300 x 58 | 4.33 | |
| 300 x 90 | 5.71 | |
| 360 x 45 | 3.74 | |
| 360 x 58 | 4.66 | |
| 360 x 90 | 6.24 | |
| 406 x 90 | 6.58 | |

RIMBOARD

| SIZE | H2S Treated |
|-----------------|-------------|
| 200 x 17 x 2.4m | |
| 240 x 17 x 2.4m | |
| 300 x 17 x 2.4m | |
| 360 x 17 x 2.4m | |

WEB STIFFENERS

| SIZE | H2S Treated |
|--------------------------------|-------------|
| 90 x 19 x 2.4m for 45mm Joists | |
| 90 x 21 x 2.4m for 52mm Joists | |
| 90 x 25 x 2.4m for 58mm Joists | |
| 90 x 39 x 2.4m for 90mm Joists | |




PLEASE NOTE:

- Allow 1 - 2 working days lead time for product LOSP H2 treatment for use over the Tropic of Capricorn

Cancelled Orders:


- A 20% restocking fee will apply
- Treated to order products returned will only be restocked as H2S
- Freight charges may apply

RFPI 20




45x35 mm LVL Flange
9.5 mm OSB Web

RFPI 400

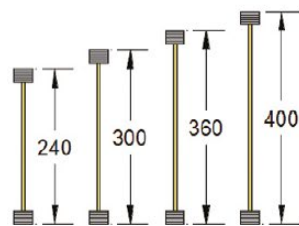


52x35 mm LVL Flange
9.5 mm OSB Web

RFPI 70

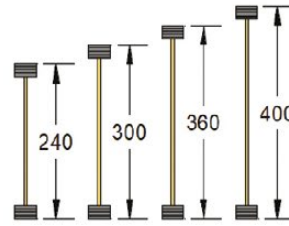



58x35 mm LVL Flange
9.5 mm OSB Web

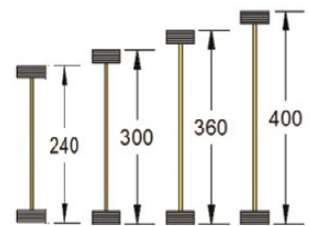RFPI 90



90x38 mm LVL Flange
11 mm OSB Web

DINDAS HANGERS

| DINDAS HANGERS | | | | | |
|-----------------|---|-----------|--|-----------------|------------------|
| I JOIST HANGERS |  I-JOIST HANGERS - FACE MOUNTED | |  TOP MOUNTED | | FRAMING BRACKETS |
| | FACE MOUNT | TOP MOUNT | FACE MOUNT | FRAMING BRACKET | |
| SIZE | FACE MOUNT | TOP MOUNT | SIZE | FACE MOUNT | |
| 200 x 45 | | | 90 x 35 | | |
| 240 x 45 | | | 130 x 35 | | |
| 240 x 58 | | | 150/170 x 35 | | |
| 240 x 90 | | | 200 x 35 | | |
| 300 x 45 | | | 90 x 45 | | |
| 300 x 52 | | | 130 x 45 | | |
| 300 x 58 | | | 150/170 x 45 | | |
| 300 x 90 | | | 200 x 45 | | |
| 360 x 45 | | | 240/300/360 x 45 | | |
| 360 x 58 | | | 170/200 x 63 | | |
| 360 x 90 | | | 200 x 90 | | |
| 406 x 90 | | | 152 x 94 | | |

DINDAS HANGERS

| DINDAS HANGERS | |
|---|--|
| DESCRIPTION/SIZE | DESCRIPTION/SIZE |
| 70 x 50 x 150 x 5.0 – Variable Skew Angle | Enseal Clear H2/H3 300g |
| 300H x Variable Width x 1.6 – Split Pair | Ecoseal Green H2 300g |
| 125mm x 2.0mm – Heavy Duty Joist Hanger | Fullertrade Constructions Adhesive 320g |
| 140mm x 1.2mm – Heavy Duty Joist Hanger | Multistruts 250mm 45 mm Chords |
| Angle Bracket 100 x 100 x 6mm 250mm | Multistruts 300mm 35 mm Chords |
| Angle Bracket 100 x 100 x 6mm 280mm | 35 x 3.15mm Galvanised Hanger Nails 500g Box |
| Angle Bracket 100 x 100 x 6mm 320mm | 35 x 3.15mm Galvanised Hanger Nails 1kg Box |
| Split Hanger 140mm (L&R Pair) | 40 x 3.75mm Galvanised Hanger Nails 500g Box |
| Split Hanger 180mm (L&R Pair) | 40 x 3.75mm Galvanised Hanger Nails 1kg Box |
| Split Hanger 220mm (L&R Pair) | 30 x 2.8mm Galvanised Hanger Nails (200) |
| Universal Triple Grip | 40 x 3.75mm Galvanised Hanger Nails (100) |
| Uniledger | Type 17 Screw 12g x 40mm (50) |
| Z Clip (10) | Antisplit Self Drilling Screw 14g x 30mm (160) |
| Cyclone Ties 1200mm | Antisplit Self Drilling Screw 14g x 65mm (80) |
| Cyclone Ties 900mm | Protectadeck 50mm x 25m |
| Cyclone Ties 600mm | Protectadeck 70mm x 15m |
| Speedbrace 6.0m | Protectadeck 90mm x 12m |

DINDAS - GL17C, GL18C and GL21C

| GL17C – LAMINATED GLULAM | | | | | | |
|--------------------------|-----------|-------------|------------|-----------|-------------|------------|
| SIZE | 65mm | | | 85mm | | |
| | Untreated | H2S Treated | H3 Treated | Untreated | H2S Treated | H3 Treated |
| 130 | | | | | | |
| 165 | | | | | | |
| 195 | | | | | | |
| 230 | | | | | | |
| 260 | | | | | | |
| 295 | | | | | | |
| 330 | | | | | | |
| 360 | | | | | | |
| 395 | | | | | | |
| 425 | | | | | | |
| 460 | | | | | | |
| 495 | | | | | | |
| 525 | | | | | | |
| 560 | | | | | | |

| GL18C – HARDWOOD GLULAM | | |
|-------------------------|----------------|----------------|
| SIZE | 65mm Untreated | 85mm Untreated |
| 155 | | |
| 185 | | |
| 215 | | |
| 240 | | |
| 270 | | |
| 300 | | |
| 330 | | |
| 360 | | |
| 390 | | |
| 420 | | |
| 450 | | |
| 480 | | |
| 510 | | |
| 540 | | |
| 570 | | |
| 600 | | |

PLEASE NOTE:

- Allow 4 - 5 working days for non stock items
- Beams are pre-cambered and B Grade Appearance
- 10% Surcharge applied for Straight Beams (no camber)
- A Grade Appearance Beams PLUS 25% to list price - Allow for 10 working days lead time

STRONG

AS

STEEL

more info HYNE.COM.AU



A new benchmark for strength

So often steel is used as a benchmark for strength, yet it's not without its weaknesses (like the carbon emitted to make the stuff). And as new technology is empowering us to perfect our glue-lamination techniques, Hyne LGL is emerging as a new benchmark for strength. Pound-for-pound it's actually stronger than steel. Plus it's easier to work with, easier on the eye, a more effective insulator of heat, certified renewable, and carbon positive. Oh, and you can hammer a nail into it! The list goes on... but just in case, here's another list for you...

- ✓ Can be used indoors + out
- ✓ Treated to H3 as standard
- ✓ Durable & will never rust
- ✓ Safer in event of a fire
- ✓ Lighter lifting on site
- ✓ Span up to 12 metres

LOVE  **TIMBER**® Why build with anything else?



Our Glulam Range

Hyne LGL

| Size | H3 Treated | |
|------|------------|------|
| | 44mm | 65mm |
| 130 | | |
| 150 | | |
| 170 | | |
| 200 | | |
| 240 | | |
| 300 | | |
| 360 | | |



Beam 17 Untreated, H2 or H3 Treated Pine

| Size | Untreated | | H2 Treated | | H3 Treated | |
|------|-----------|-----|------------|------|------------|------|
| | 65mm | 85m | 65mm | 85mm | 65mm | 85mm |
| 130 | | | | | | |
| 165 | | | | | | |
| 195 | | | | | | |
| 230 | | | | | | |
| 260 | | | | | | |
| 295 | | | | | | |
| 330 | | | | | | |
| 360 | | | | | | |
| 395 | | | | | | |
| 425 | | | | | | |

Beam 18

Victorian Ash (For internal use only)

| Size | Untreated | |
|------|-----------|-----|
| | 65mm | 85m |
| 120 | | |
| 155 | | |
| 185 | | |
| 215 | | |
| 245 | | |
| 270 | | |
| 300 | | |
| 330 | | |
| 360 | | |
| 420 | | |

Beam 21

Mixed Hardwoods or Spotted Gum

| Size | Mixed Hardwood Structural | | Spotted Gum Select | |
|------|---------------------------|-----|--------------------|------|
| | 65mm | 85m | 65mm | 85mm |
| 120 | | | | |
| 155 | | | | |
| 185 | | | | |
| 215 | | | | |
| 245 | | | | |
| 280 | | | | |
| 300 | | | | |
| 315 | | | | |
| 350 | | | | |
| 380 | | | | |
| 410 | | | | |
| 445 | | | | |

Deck Joists

3.0kPa live load, pencil round decking, no ceiling

| Size | Joist Spacing Single Span | | Joist Spacing Continuous Span | |
|----------|---------------------------|-------|-------------------------------|-------|
| | 0.30m | 0.45m | 0.30m | 0.45m |
| 130 x 44 | 3100 | 2600 | 3600 | 3000 |
| 150 x 44 | 3500 | 3100 | 4200 | 3400 |
| 170 x 44 | 4000 | 3500 | 4700 | 3900 |
| 200 x 44 | 4500 | 4100 | 5400 | 4600 |
| 245 x 44 | 5300 | 4900 | 6300 | 5600 |
| 300 x 44 | 6200 | 5700 | 7300 | 6600* |
| 360 x 44 | 7100 | 6500 | 8400 | 7600# |
| 130 x 65 | 3800 | 3000 | 4300 | 3700 |
| 150 x 65 | 4400 | 3600 | 4800 | 4300 |
| 170 x 65 | 4800 | 4200 | 5300 | 4700 |
| 200 x 65 | 5400 | 4900 | 5900 | 5400 |
| 245 x 65 | 6200 | 5700 | 6900 | 6300 |
| 300 x 65 | 7200 | 6600 | 7200 | 7200 |
| 360 x 65 | 8100 | 7500 | 7200 | 7200 |

*Bearing width 65mm required #Bearing width 85mm required

Floor Joists

1.5kn live load, wind area N3, particle board flooring, no ceiling under

| Size | Joist Spacing Single Span | | | Joist Spacing Continuous Span | | |
|----------|---------------------------|-------|-------|-------------------------------|-------|-------|
| | 0.30m | 0.45m | 0.60m | 0.30m | 0.45m | 0.60m |
| 130 x 44 | 3400 | 2600 | 2500 | 3900 | 3100 | 2900 |
| 150 x 44 | 3900 | 3100 | 2900 | 4300 | 3700 | 3400 |
| 170 x 44 | 4300 | 3600 | 3400 | 4700 | 4300 | 4000 |
| 200 x 44 | 4900 | 4300 | 4000 | 5400 | 4800 | 4500 |
| 245 x 44 | 5700 | 5200 | 4800 | 6300 | 5700 | 5300 |
| 300 x 44 | 6700 | 6000 | 5600 | 7300 | 6600 | 6100 |
| 360 x 44 | 7600 | 6900 | 6400 | 8400 | 7600 | 7000 |
| 130 x 65 | 3900 | 3000 | 2900 | 4300 | 3700 | 3400 |
| 150 x 65 | 4400 | 3600 | 3400 | 4800 | 4300 | 4000 |
| 170 x 65 | 4800 | 4200 | 3900 | 5300 | 4700 | 4400 |
| 200 x 65 | 5400 | 4900 | 4600 | 5900 | 5400 | 5000 |
| 245 x 65 | 6300 | 5700 | 5300 | 6900 | 6300 | 5800 |
| 300 x 65 | 7400 | 6700 | 6200 | 7200 | 7200 | 6800 |
| 360 x 65 | 8500 | 7600 | 7100 | 7200 | 7200 | 7200 |



LOVE  **TIMBER**®